



# Viscolite VL7-100B-d15

portable viscometer

innovators in fluid measurement

Hydramotion

- ▶ convenient hand-held design
- ▶ integral temperature probe
- ▶ simple operation and cleaning
- ▶ no moving parts — no maintenance

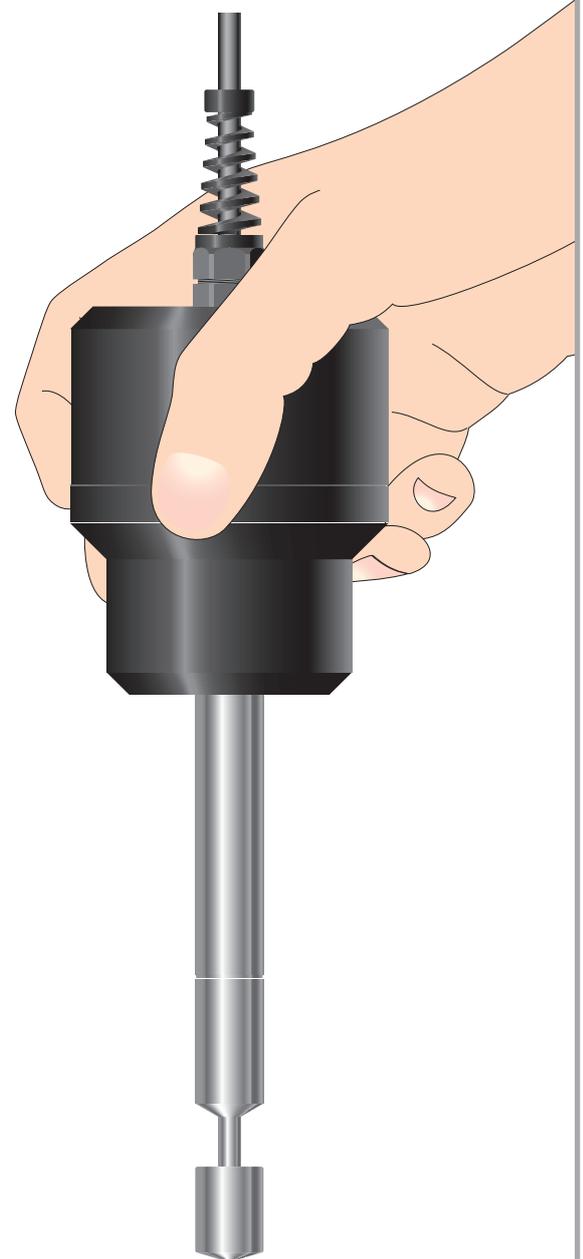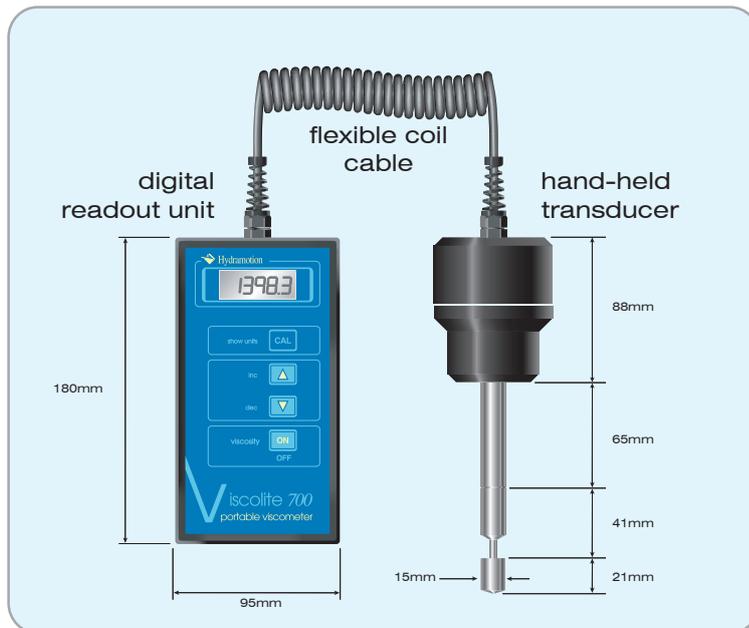

## SPECIFICATION

Viscosity range	0 - 5,000 cP
Measurement time	1 second
Accuracy	1% of reading or $\pm 0.1$ cP
Repeatability	0.5% of reading or $\pm 0.1$ cP
Temperature range	-20 - +120 °C
Minimum sample	10 cc (10 ml)
Probe weight	500 g
Display unit weight	500 g
Overall length	215 mm
Materials	wetted parts: SS316 (EN 1.4401) enclosure: acetal (Delrin®)
Ingress protection	IP65
Power supply	4 × AA (or equivalent) alkaline cells
Features	integral temperature sensor and viscosity correction
Option	Highly polished sensing surface

Hydramotion Ltd  
1 York Road Park,  
Malton, York,  
England YO17 6VA

tel: +44 (0) 1653 600294  
fax: +44 (0) 1653 693446  
mail@hydramotion.com  
[www.hydramotion.com](http://www.hydramotion.com)