

Hydrogen Sulfide 0.5/a

Order No. 67 28 041


Application Range

Standard Measuring Range:	0.5 to 15 ppm / 5 to 150 ppm
Number of Strokes n:	10 / 1
Time for Measurement:	approx. 6 min / approx. 40 sec.
Standard Deviation:	± 5 to 10 %
Color Change:	white → pale brown

Ambient Operating Conditions


Temperature:	0 to 40 °C
Absolute Humidity:	3 to 30 mg H ₂ O / L

Reaction Principle



Cross Sensitivity

No interference by:	100 ppm sulfur dioxide
	100 ppm hydrochloric acid
	100 ppm ethyl mercaptan

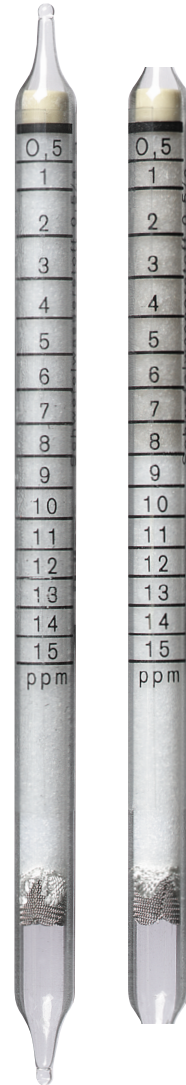

ST-126-2001



On more than 420 pages you can learn all about Dräger-Tubes.
Download here the complete handbook.