


Interchangeable Head

SH

Open Spanner Head

RoHS

The SH type spanner heads suit for the place where sockets can not be used, for flare nuts in piping and for work in narrow places.



SH15Dx19

Tohnichi Head Size	Model (Body Size × Width)	Allowable Torque		Outside Width C [mm]	Thickness t [mm]
		[N·m]	[kgf·cm]		
6D	NEW SH6D×5.5	1.5	15	13	3
	NEW SH6D×6	2.5	25	15	
	NEW SH6D×7	3.5	35	17	
	NEW SH6D×8			18	
	NEW SH6D×10			20	4.5
	NEW SH6D×11			21	
	NEW SH6D×12	5	50	22	
	NEW SH6D×13			23	5
	NEW SH6D×14			24	
	NEW SH6D×16			26	
8D	NEW SH6D×17			27	
	NEW SH6D×19			29	
	SH8D×5.5	1.5	15	13	3
	SH8D×6	2.5	25	15	3.5
	SH8D×7	3.5	35	17	4
	SH8D×8	7	70	20	4.5
	SH8D×10	14	140	25	5.5
	SH8D×11			27	
	SH8D×12			29	
	SH8D×13	15	150	31	6.5
10D	SH8D×16			32	
	SH8D×17			32	
	SH8D×19			35	
	SH8D×21			36	
	SH8D×22			37	
	SH8D×24			38	
	SH10D×7	20	200	28	6.5
	SH10D×8				
	SH10D×10				
	SH10D×11				
	SH10D×12	25	250	32	
	SH10D×13				
	SH10D×14				
	SH10D×16				
	SH10D×17			39	13
12D	SH10D×18				
	SH10D×19				
	SH10D×21				
	SH10D×22				
	SH10D×24			43	
	SH12D×8	7	70	20	5
	SH12D×10	12	120	24	5.5
	SH12D×11	20.5	205	28	
	SH12D×12	29.5	295	31	
	SH12D×13			32	6.5
15D	SH12D×14	59	590	38	8
	SH12D×16			40	10
	SH12D×17			41	11
	SH12D×18			43	13
	SH12D×19	70	700	43	
	SH12D×21			48	
	SH12D×22			48	13
	SH12D×24			52	
	SH12D×27			52	

Tohnichi Head Size	Model (Body Size × Width)	Allowable Torque		Outside Width C [mm]	Thickness t [mm]
		[N·m]	[kgf·cm]		
15D	SH15D×12	59	590	38	8
	SH15D×13				
	SH15D×14				
	SH15D×16				
	SH15D×17	140	1400	51	13
	SH15D×18				
	SH15D×19				
	SH15D×21				
	SH15D×22			60	12
	SH15D×24				
19D	SH15D×26	200	2000	54	13
	SH15D×27				
	SH15D×30				
	SH15D×32				
	SH15D×36	180	1800	68	15
	SH15D×41				
	SH19D×17				
	SH19D×18			76	11
	SH19D×19				
	SH19D×21				
22D	SH19D×22	280	2800	103	15
	SH19D×24				
	SH19D×27				
	SH19D×30				
	SH22D×19	500	5000	85	21
	SH22D×22				
	SH22D×24				
	SH22D×27				
	SH22D×30	750	7500	100	24
	SH22D×32				
27D	SH22D×34			103	26
	SH22D×36				
	SH22D×41				
	SH22D×46	850	8500	110	24
	SH22D×50				
	SH22D×55				
	SH27D×22			120	29
	SH27D×24				
	SH27D×27				
	SH27D×30				
32D	SH27D×32	1200	12000	120	29
	SH27D×34				
	SH27D×36				
	SH27D×41				
	SH27D×46	850	8500	105	18
	SH27D×50				
	SH32D×27			110	24
	SH32D×30				
	SH32D×32				
	SH32D×34				
32D	SH32D×36	1200	12000	120	29
	SH32D×41				
	SH32D×46				
	SH32D×50				
	SH32D×55	850	8500	105	18
	SH32D×60				

Inch Size Models

Commonly used in the airline industry and for specific American product installation and maintenance.

Tohnichi Head Size	Model (Body Size × Inner Width [in])	Inner Width [mm]	Allowable Torque N·m [lbf·in]	Outside Width C mm [in]	Thickness t mm [in]
8D	SH8D×1/4	6.35	2.5 [22]	15 [0.59]	3.5 [0.14]
	SH8D×5/16	7.94	7 [61]	20 [0.79]	4.5 [0.18]
	SH8D×3/8	9.53	14 [123]	25 [0.98]	5.5 [0.22]
	SH8D×7/16	11.11		27 [1.06]	
	SH8D×1/2	12.7	15 [132]	29 [1.14]	
	SH8D×9/16	14.29			6.5 [0.26]
10D	SH10D×1/4	6.35	20 [177]	28 [1.10]	6.5 [0.26]
	SH10D×5/16	7.94			
	SH10D×3/8	9.53			
	SH10D×7/16	11.11	25 [221]	32 [1.26]	
	SH10D×1/2	12.7			
	SH10D×9/16	14.29			
12D	SH12D×3/8	9.53	12 [106]	24 [0.94]	5 [0.20]
	SH12D×7/16	11.11	20.5 [181]	31 [1.22]	6.5 [0.26]
	SH12D×1/2	12.7	29.5 [261]	32 [1.26]	
	SH12D×9/16	14.29		40 [1.57]	
	SH12D×5/8	15.88	59 [522]	41 [1.61]	11 [0.43]
	SH12D×11/16	17.46	70 [620]	43 [1.70]	13 [0.51]
15D	SH15D×1/2	12.7	59 [522]	38 [1.50]	8 [0.31]
	SH15D×9/16	14.29			
	SH15D×5/8	15.88			
	SH15D×11/16	17.46	140 [1239]	51 [2.01]	13 [0.51]
	SH15D×3/4	19.05			

Tohnichi Head Size	Model (Body Size × Inner Width [in])	Inner Width [mm]	Allowable Torque		Outside Width C mm [in]	Thickness t mm [in]
			N·m [lbf·in]			
15D	SH15D×13/16	20.64	140 [1239]	51 [2.01]	13 [0.51]	12 [0.47]
	SH15D×7/8	22.23				
	SH15D×15/16	23.81				
	SH15D×1	25.40				
	SH15D×1-1/16	26.99				
	SH15D×1-1/8	28.58				
19D	SH15D×1-3/16	30.16	200 [1947]	72 [2.83]	11 [0.43]	11 [0.43]
	SH15D×1-1/4	31.75				
	SH15D×1-5/16	33.34				
	SH15D×1-3/8	34.93				
	SH15D×1-7/16	36.51				
	SH15D×1-1/2	38.10				
19D	SH19D×15/16	23.81	200 [1947]	72 [2.83]	11 [0.43]	11 [0.43]
	SH19D×1	25.4				
	SH19D×1-1/16	26.99				
	SH19D×1-1/8	28.58				
	SH19D×1-3/16	30.16				
	SH19D×1-1/4	31.75				
19D	SH19D×1-5/16	33.34	200 [1947]	72 [2.83]	11 [0.43]	11 [0.43]
	SH19D×1-3/8	34.93				
	SH19D×1-7/16	36.51				
	SH19D×1-1/2	38.1				




The Relationship between Interchangeable Heads and Torque Wrenches

Tohnichi's interchangeable head wrenches have specific diameter round ends that fit into corresponding head base openings. Head and wrench model names include the diameter sizes so heads can be matched to wrenches that will accept those heads.

For example: SH15D×17 will fit on CL100N×15D

A variety of different head types (SH, RH, QH, RQH, FH, DH, AH and SH-N) can be used on one wrench or different types of wrenches such as CL (for tightening) and CEM3-G (for inspection) can use the same head that has the corresponding diameter size.



RH


Ring Head

RoHS

The RH type ring heads guarantee the safe work as the axes of bolt and RH ring head are always aligned and prevent the heads will drop.

Note: RH8D×5.5 to RH8D×7 are single hex shape.

Tohnichi Head Size	Model (Body Size × Width)	Allowable Torque		Outside Width C [mm]	Thickness t [mm]
		[N·m]	[kgf·cm]		
8D	RH8D×5.5	1.5	15	10.5	5
	RH8D×6	2.4	24	11	
	RH8D×7	3.6	36	12	
	RH8D×8	7.2	72	13.5	6
	RH8D×10	12.2	122	15.5	
	RH8D×11			17	7
10D	RH10D×8	7.2	72	12.5	6
	RH10D×10	12.2	122	15.5	7
	RH10D×11	20	200	17	
	RH10D×12			18	
	RH10D×13			19	
	RH10D×14			20	
12D	RH12D×8	7.2	72	15	5
	RH12D×10	12.2	122	16	
	RH12D×11	20	200	18	5.5
	RH12D×12	29.5	295	20	6.5
	RH12D×13			21	
	RH12D×14	59	590	20	10
15D	RH15D×12			24	
	RH15D×13			25	
	RH15D×14			26	12
	RH15D×16	70	700	29	
	RH15D×17			30	13
	RH15D×18			31	
19D	RH19D×14	59	590	22.5	8
	RH19D×17			27	10
	RH19D×18	100	1000	28	11
	RH19D×19			29	
	RH19D×21	166	1660	32	13
	RH19D×22			35	
22D	RH22D×19	166	1660	30	14
	RH22D×22	255	2550	34	
	RH22D×24			37	15
	RH22D×27	490	4900	41	
	RH22D×30			44	
	RH22D×32			45	
27D	RH27D×19	166	1660	30	14
	RH27D×22	255	2550	34	
	RH27D×24			37	15
	RH27D×27	490	4900	41	
	RH27D×30			44	
	RH27D×32			45	
32D	RH32D×19	166	1660	30	14
	RH32D×22	255	2550	34	
	RH32D×24			37	15
	RH32D×27	490	4900	41	
	RH32D×30			44	
	RH32D×32			45	



RH15D×17

Tohnichi Head Size	Model (Body Size × Width)	Allowable Torque		Outside Width C [mm]	Thickness t [mm]
		[N·m]	[kgf·cm]		
8D	RH8D×5.5	1.5	15	10.5	5
	RH8D×6	2.4	24	11	
	RH8D×7	3.6	36	12	
	RH8D×8	7.2	72	13.5	6
	RH8D×10	12.2	122	15.5	
	RH8D×11			17	7
10D	RH10D×8	7.2	72	12.5	6
	RH10D×10	12.2	122	15.5	7
	RH10D×11	20	200	17	
	RH10D×12			18	
	RH10D×13			19	
	RH10D×14			20	
12D	RH12D×8	7.2	72	15	5
	RH12D×10	12.2	122	16	
	RH12D×11	20	200	18	5.5
	RH12D×12	29.5	295	20	6.5
	RH12D×13			21	
	RH12D×14	59	590	20	10
15D	RH15D×12			24	
	RH15D×13			25	
	RH15D×14			26	12
	RH15D×16	70	700	29	
	RH15D×17			30	13
	RH15D×18			31	
19D	RH19D×14	59	590	22.5	8
	RH19D×17			27	10
	RH19D×18	100	1000	28	11
	RH19D×19			29	
	RH19D×21	166	1660	32	13
	RH19D×22			35	
22D	RH22D×19	166	1660	30	14
	RH22D×22	255	2550	34	
	RH22D×24			37	15
	RH22D×27	490	4900	41	
	RH22D×30			44	
	RH22D×32			45	
27D	RH27D×19	166	1660	30	14
	RH27D×22	255	2550	34	
	RH27D×24			37	15
	RH27D×27	490	4900	41	
	RH27D×30			44	
	RH27D×32			45	
32D	RH32D×19	166	1660	30	14
	RH32D×22	255	2550	34	
	RH32D×24			37	15
	RH32D×27	490	4900	41	
	RH32D×30			44	
	RH32D×32			45	

Inch Size Models

Commonly used in the airline industry and for specific American product installation and maintenance.

Tohnichi Head Size	Model (Body Size × Inner Width [in])	Inner Width [mm]	Allowable Torque N·m [lb·in]	Outside Width C [mm]	Thickness t [mm]
8D	RH8D×1/4	6.35	3.6 [31]	11 [0.43]	5 [0.20]
	RH8D×5/16	7.94	7.2 [63]	13.5 [0.53]	6 [0.24]
	RH8D×3/8	9.53	12.2 [108]	15 [0.59]	
	RH8D×7/16	11.11	15 [132]	17 [0.67]	7 [0.28]
10D	RH10D×1/4	6.35		11 [0.43]	
	RH10D×5/16	7.94	7.2 [64]	12.5 [0.49]	6 [0.24]
	RH10D×3/8	9.53	12.2 [108]	15.5 [0.61]	7 [0.28]
	RH10D×7/16	11.11		17 [0.67]	
12D	RH12D×1/2	12.7	25 [221]	19 [0.75]	8 [0.31]
	RH12D×9/16	14.29		20 [0.79]	
	RH12D×3/8	9.53	12.2 [108]	16 [0.63]	5 [0.20]
	RH12D×7/16	11.11	20 [177]	18 [0.71]	5.5 [0.22]
15D	RH15D×1/2	12.7	29.5 [261]	21 [0.83]	6.5 [0.26]
	RH15D×9/16	14.29		20 [0.79]	
	RH15D×5/8	15.88	59 [522]	24 [0.94]	10 [0.39]
	RH15D×3/4	19.05		28 [1.10]	13 [0.51]

Tohnichi Head Size	Model (Body Size × Inner Width [in])	Inner Width [mm]	Allowable Torque N·m [lb·in]	Outside Width C [mm]	Thickness t [mm]
15D	RH15D×1/2	12.7	29.5 [261]	19 [0.81]	7 [0.28]
	RH15D×9/16	14.29		22 [0.87]	
	RH15D×5/8	15.88	59 [522]	25 [0.98]	8 [0.31]
	RH15D×11/16	17.46	100 [885]	26 [1.06]	10 [0.39]
19D	RH19D×1/2	12.7	29.5 [261]	19 [0.81]	7 [0.28]
	RH19D×9/16	14.29		22 [0.87]	
	RH19D×5/8	15.88	59 [522]	25 [0.98]	8 [0.31]
	RH19D×11/16	17.46	100 [885]	26 [1.06]	10 [0.39]




The Relationship between Interchangeable Heads and Torque Wrenches

Tohnichi's interchangeable head wrenches have specific diameter round ends that fit into corresponding head base openings. Head and wrench model names include the diameter sizes so heads can be matched to wrenches that will accept those heads.

For example: SH15D×17 will fit on CL100N×15D


A variety of different head types (SH, RH, QH, RQH, FH, DH, AH and SH-N) can be used on one wrench or different types of wrenches such as CL (for tightening) and CEM3-G (for inspection) can use the same head that has the corresponding diameter size.

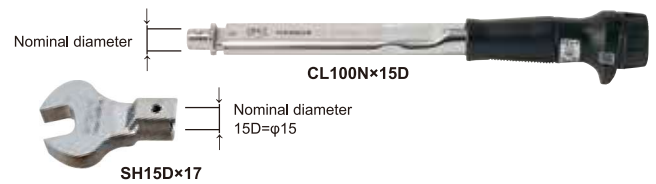

QH

Ratchet Head

RoHS



QH15D

As the QH type ratchet heads need only small swing for tightening, they suit for operations in narrow spaces.


Head Size	Model	Dimensions			
		Sq. Drive a [mm]	Outside Width c [mm]	h [mm]	b [mm]
NEW 6D	QH6D		15	15.5	
8D	QH8D	6.35	23	17.5	7.5
10D	QH10D-1/4		26	18.5	
	QH10D			22	
12D	QH12D	9.53	32	25.6	11
15D	QH15D-3/8		37.5	30.5	
	QH15D			33.5	14
19D	QH19D	12.7	40	38.4	15.4
22D	QH22D-1/2		51	41.5	15.5
	QH22D			46.5	20.5
27D	QH27D	19.05	70	49.7	21.5
32D	QH32D	25.4	74	55.7	26.5

Note 1. For the model having 25.4mm square drive, use a through-hole socket.
QH15D-3/8 Tmax 100N·m
QH22D-1/2 Tmax 280N·m
2. Ratchet protective cover is available. Refer to page 49.

DH

Square Drive Head

RoHS



DH15D

The DH square drive heads are the standard interchangeable head. They are useful when tightening a large number of matching screws with a common torque wrench. It is recommended to keep one set. They are used with sockets.


Head Size	Model	Dimensions			
		Sq. Drive a [mm]	Outside Width c [mm]	h [mm]	b [mm]
10D	DH10D	9.53	18	22.5	13
12D	DH12D			23	
15D	DH15D		22		
19D	DH19D	12.7	24	29.5	16.5
22D	DH22D		34	43.3	
27D	DH27D	19.05	42	44.5	23.5
32D	DH32D	25.4	50	58.5	30.25

Note DH32D is a through hole type.

HH

Hex Head

RoHS



HH10D×6

HH hex-head is for hexagon socket head bolts. A hex key can be inserted.

The HH hex-head is for hex. socket head cap screws.

Head Size	Model (Body Size × Width)	Dimensions			
		Outside Width C [mm]	t [mm]	m [mm]	φd2 b [mm]
8D	HH8D	12	14.5	-	-
	HH10D×5	11			
10D	HH10D×6	12	8		
	HH10D×8	15			
	HH12D×5	11		19	7
12D	HH12D×6	14	10		
	HH12D×8	15			
	HH12D×10	17			
	HH15D×8	14			
15D	HH15D×10	17		21	
	HH15D×12	20			
	HH15D×14	21.5			
	HH19D×10	17	13		8.5
	HH19D×12	21.5			
19D	HH19D×14	23		23	
	HH19D×17	27			
	HH19D×19	29			
	HH22D×12	19.5			
	HH22D×14	27			
22D	HH22D×17	30	17	26	10
	HH22D×19	32			
	HH22D×22	35			

Note 1. To be used with hex. key inserted.
2. HH8D is not used with hex. key but interchangeable bit.
3. Insertion of HH10D×5 and HH10D×6 are hexagon. Others are double hexagon.




HH8D

Bits are sold separately.
Refer to page 10.

RQH

Female Ratchet Head

RoHS



RQH15D×17

As the RQH type ratchet heads need only small swing for tightening, they suit for operations in narrow and low ceiling spaces.

Head Size	Model (Body Size × Width)	Dimensions			
		D [mm]	Outside Width C [mm]	H [mm]	h [mm]
12D	RQH12D×12				
	RQH12D×14	20.5	32	24.1	
15D	RQH15D×14				
	RQH15D×17	24.5	37.5	29	
	RQH19D×17				10
19D	RQH19D×19	31	45	28	
	RQH19D×22				
22D	RQH22D×22	35.2	51	35	
	RQH22D×24				

Ratchet Protective Cover for QH/RQH

Fit on your Tohnichi Ratchet Head to protect your work



872 with QH12D


870

Part #	Applicable Interchangeable Head
870	QH8D
871	QH10D
872	QH12D/RQH12D
874	QH15D/RQH15D
875	QH19D
876	RQH19D
878	QH22D/RQH22D

AH/AH2

Adjustable Open End Head

RoHS



AH15D2x30

AH is easy and convenient to use for applications that require different size bolt heads. Available currently only for the 15mm diameter root shaped Tohnichi torque wrenches.

Head Size	Model (Body Size × Width)	Allowable Torque		Inner Width Min.-Standard- Max.[mm]	Dimensions			
		[N·m]	[kgf·cm]		S [mm]	L [mm]	t [mm]	h [mm]
10D	AH10D×13	25	250	3-8-13	36	57	9	23
	AH10D×26			7-17-26	49	62	11	25
12D	AH12D×13	30	300	3-8-13	36	66	9	23
	AH12D×26			7-17-26	49	71	11	26
15D	AH12D×36	50	500	8-22-36	65	78	13	27
	AH15D2×26			10-18-26	50	77	11	31
15D	AH15D2×30	100	1000	13-22-30	60	84	12	32
	AH15D2×36	140	1400	13-24-36	65	87	13	33

Note Use with a click type torque wrench.

PH

Pipe Wrench Head

RoHS



PH15D×350

The PH heads suit for use with pipes and plumbing applications.


Head Size	Model (Body Size × Width)	Pipe Wrench Head Max. Length [mm]	Applicable Pipe Diameter [mm]	Standard Pipe Diameter [mm]	Recommendable Torque Wrench
15D	PH15D×350				
19D	PH19D×350	350	13-38	25.5	CSP
	PH22D×350				
22D	PH22D×450	450	26-52	39	

Note 1. PH can be used with CSP model (P.18) only.
2. PH head will not be provided individually, order it together with a CSP model. The PH head and the wrench are shipped in a fixed.
3. For graduated style, PHL models are available.

FH

Hook Head


RoHS



FH

The FH hook heads are ideal for use with bearing locknut applications.


Head Size	Model (Body Size × Width)	Applicable Size of Nut Outside Diameter [mm]	Nominal Size of Screw	Dimensions							
				r [mm]	θ° [mm]	b [mm]	t [mm]	H [mm]	D [mm]	L2 [mm]	d [mm]
15D	FH15D×30	30-38	M20	16		3	6	30			
	FH15D×38	38-45	M25	20							
	FH15D×45	45-52	M30	24							
	FH15D×52	52-58	M35	27	60	3.5	7	30.5			4.5
19D	FH15D×58	58-65	M40	31				31			
	FH19D×65	65-75	M45, M50	35.5		4.5	8	35.5	29	9.5	
22D	FH22D×75	75-85	M60, M65	39				38.5			
	FH22D×85	85-98	M70, M75	45.5	45	5	10	40	32	11	5.5

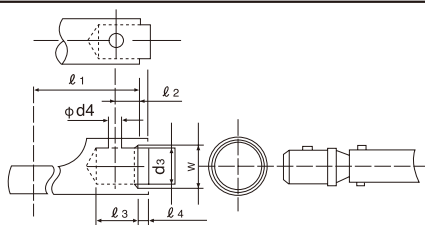

SH-N

Open End Head with Notch

RoHS



SH-N models (except for SH10D-5×10N)



SH10D-1×10N




SH10D-5×10N

The notch creates speed in the tightening process by grasping the side of the fastener without removing the wrench. Ideal for brake line assembly.

Head Size	Model (Body Size × Width)	Allowable Torque		Dimensions			
		[N·m]	[kgf·cm]	Outside Width C [mm]	Thickness H [mm]	t [mm]	h [mm]
10D	SH10D-1×10N				18.75	12	6
	SH10D-3×10N	22.5	225		20.25	15	7.5
	SH10D-5×10N	19	190		24.5		-
	SH10D-4×10N			24	17.75	10	5
	SH10D-9×10N	22.5	225		18.75		6
	SH10D×11N				18.8	12	
	SH10D×12N	25	250	32	16	6.5	3.25
	SH12D×11N			30	19	7.5	-
	SH12D-1×12N				21	12	6
	SH12D-3×12N	30	300	32	22.5	15	7.5
12D	SH12D-5×12N				26		-
	SH12D-4×12N				20	10	5
	SH12D-1×14N				21	12	6
	SH12D-3×14N	40	400	35	22.5	15	7.5
	SH12D-5×14N				26		-
	SH12D-4×14N				20	10	5
	SH12D-1×17N				21	12	6
	SH12D-3×17N	50	500	38	22.5	15	7.5
	SH12D-5×17N				26		-
	SH12D-4×17N				20	10	5

CPQH

Corrosion-Resistant Ratchet Head



CPQH12D

QH type ratchet head with anticorrosion coating is ideal for wet conditions and features ratcheting action for narrow spaces.

Head Size	Model	Dimensions			
		Sq. Drive a [mm]	Outside Width c [mm]	h [mm]	b [mm]
10D	CPQH10D		26	22	
12D	CPQH12D	9.53	32	25.6	11
15D	CPQH15D		37.5	33.5	14
19D	CPQH19D	12.7	40	38.4	15.4

Common Dimensions for Interchangeable Head

Model	Dimensions [mm]						
	L1	L2	L3	L4	d3	d4	W
SH8D, RH, QH, HH	35	4	10	2	8	3.0	9
SH10D, RH, QH, HH, DH, SH-N	44	5	12	2.5	10	3.5	12
SH12D, RH, QH, HH, DH, RQH	53	6	14	3	12	3.5	14
SH15D, RH, QH, HH, DH, RQH, FH	63	7.5	17	3	15	4.5	17
SH19D, RH, QH, HH, DH, RQH, FH	80	9.5	21	3	19	4.5	21
SH22D, RH, QH, HH, DH, RQH, FH	100	11	24	3.5	22	5.5	24
SH27D, RH, QH, DH	125	13.5	29	5	27	6.5	30
SH32D, RH, QH, DH	160	16	34	7	32	6.5	35

Note When requesting a special head that is used with various types of torque wrench, it is strictly required to follow the "L1" dimension to keep torque accuracy. Any deviation from the "L1" dimension affects torque accuracy.

